

FIG. 1

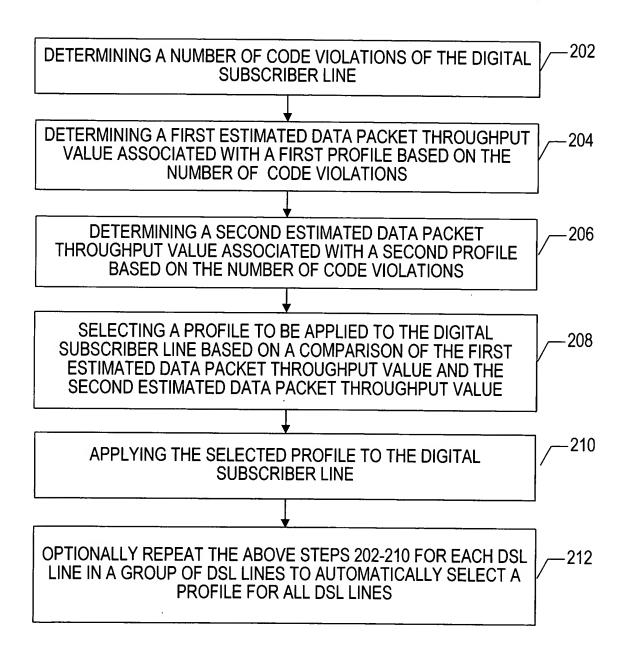


FIG. 2

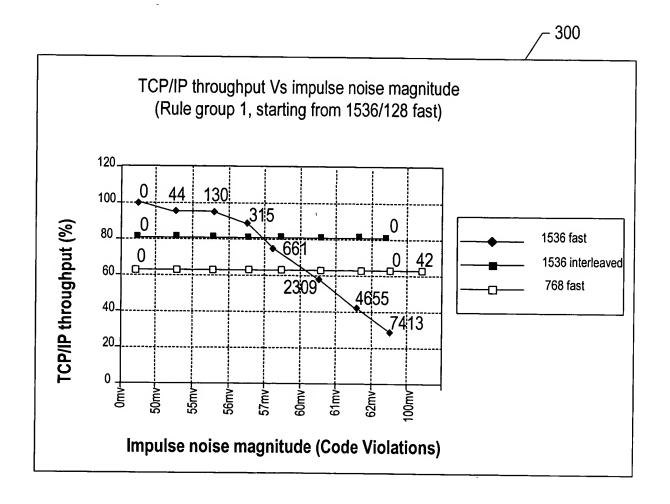


FIG. 3

4/6 400 768 fast TCP/IP throughput Vs impulse noise magnitude 768 interleaved (Rule group 2, starting from 768/128 fast) 384 fast 120. 61 100 TCP/IP throughput (%) 80 1815_0 201 60 640 **→**41D9 40 20. 0 Impulse noise magnitude (Code Violations)

FIG. 4

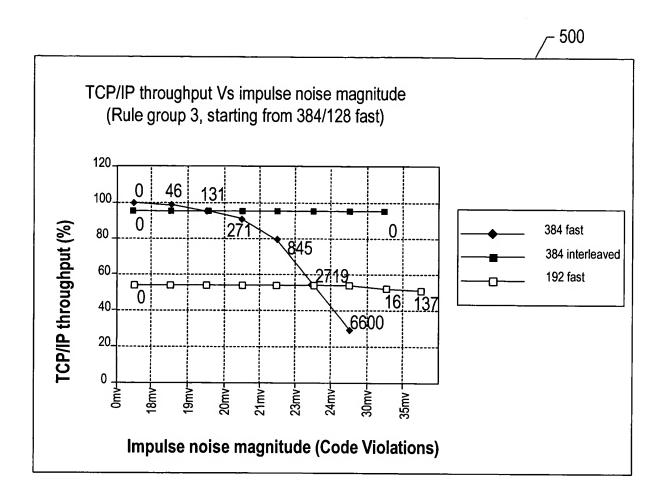


FIG. 5

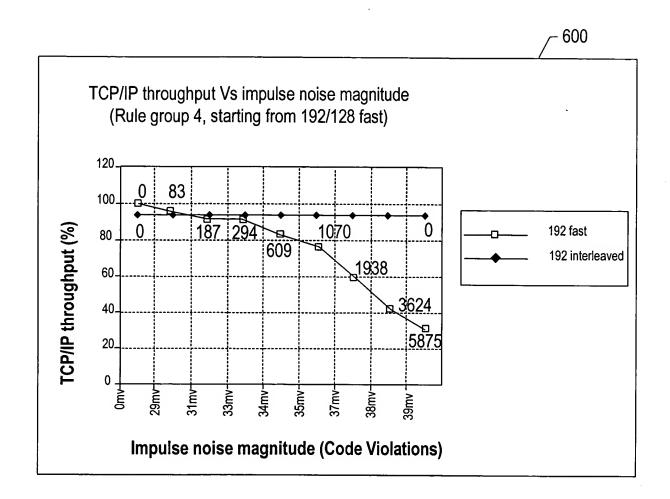


FIG. 6